

Seismic Analysis of Tall Structure Considering Variable Column Condition Using Analysis Tool

Rahul Kumar¹, Praveen Ghidode²

¹Dept of Civil Engineering

²Assist.Professor, Dept of Civil Engineering

^{1,2} Sam Global University, Raisen-464551, Madhya Pradesh, India

Abstract- One important factor that affects the project's or building's economy is the distance between columns. Because of this relationship between column spacing and panel size, the cost of raw materials can vary in reinforced concrete buildings. When column spacing is smaller, panels are smaller, and when column spacing is larger, panels are larger. The influence of column spacing on economy is examined in this study through a comparison of the construction of G+14 R.C. Moment Resisting Frames. Three scenarios of column spacing—C1 (300x300mm), C2 (400x400mm), and combination (C1 and C2)—are taken into consideration in order to assess the impact of column spacing on economy. Using E-TABS, the structure is modelled, examined, and designed in accordance with IS 456:2000. The amount of concrete, steel, and shuttering is calculated using the E-TABS. These models are examined to determine the relation for the ideal column dimension or combination taking into account the same building loading conditions. The building's aspect ratio is set at 1.5, and the most cost-effective structure is determined by adding the costs of the shuttering, steel, and concrete together.

Keywords- Aspect Ratio, Optimum Column size, E – TABS, Multi – Storey Building, Quantity Modelling

I. INTRODUCTION

The population and land requirement for residential and commercial purposes is continuously increasing in urban areas, multistoried buildings are becoming common in construction industry. The low rise, high – rise buildings, apartments and multistorey buildings can be compared on the basis of required area for people but it also compared on the basis of required material for construction or cost. The cost is analyzed for sub – structure and super – structures. In this research, the cost is analyzed only for super – structural components. These components are column, beam and slab. The quantity of steel, concrete and shuttering is determined for each component. For multi-storey building, there are various forms of structure configuration possible. Depending upon the height of building, the form of structure is decided. The economy of such a structure is governed by many factors like, form of structure, selection of material, construction

technique, time required for different work to execute. Spacing of column in a Reinforced concrete building is an important factor to determine the dimensions of columns itself, beams, slab etc. Therefore, cost of the material is also influenced by span length. In multi-story buildings, it has been discovered that the column spacing can be a significant factor in determining how economically efficient the structure is. The goal of the current study is to determine how column spacing affects building costs. Based on those crucial findings, the right column spacing for multi-story buildings will be chosen.

Lateral Loads

The majority of lateral loads are live loads, with a horizontal force acting on the structure as their primary component. A wind load against a facade, an earthquake, earth pressure against a retaining wall along a beach, or earth pressure against a basement wall are examples of typical lateral loads. The location, structural components, height, and shape of the building all affect the intensity of the majority of lateral stresses. In the majority of small and moderate-sized buildings, the dynamic effects of wind and seismic loads are often assessed as an equivalent static load. The computer's iterative capabilities must be used by others. The following succinct overview and straightforward examples only scratch the surface of the complexity of the design wind and seismic loads on a building. The design wind load determination is more thoroughly explained for the various regions of India in the Uniform Building Code.

OBJECTIVES OF THE RESEARCH

- Seismic Analysis of G+14 building by IS 1893(Part-I):2002 Criteria for Earthquake Resistant Design of Structures.
- Seismic Analysis of G+14 building considering two different column size and its combinations.
- Comparing the results of Indian standards.
- To carry out Linear Dynamic Analysis method such as Response Spectrum Analysis method for different sizes of Column using software ETABS.

II. REVIEW OF LITERATURE SURVEY

Himanshu Krishna and Prince Yadav (2022) An analysis of the seismic performance of multistory G+4 buildings with rectangular columns and buildings with unique shaped columns was the goal of the research work. The proposed buildings are examined using comparable static analysis for zone III in soil condition in accordance with IS Code 1893 (part 1):2016. The models were analysed using ETABS.

According to the findings, buildings with unique columns exhibit the fewest deflections, drifts, and shear forces when compared to buildings with standard columns. Buildings with unique columns displayed more rigidity than buildings with standard columns. Even using customised columns when construction is safer than using conventional ones.

Mohammed Rady and Sameh Youssef Mahfouz (2022) The goal of the study article was to examine how concrete grades and column spacings affect reinforced concrete (RC) building design. For buildings with three alternative floor systems—flat plates (FS), flat slabs with drop panels (FSDP), and solid slabs—cost design optimization was carried out with this goal in mind (SS). Because the evolutionary method offered by the Excel solver can handle the complexity of structural design issues, it was chosen as the optimization process. The goal was to reduce the building's overall construction costs while still adhering to the requirements of the Egyptian Code of Practice, which included charges for labour, formwork, reinforcement bars, and concrete (ECP-18).

In terms of direct construction costs for low-rise RC residential buildings, the results showed that low concrete grades (i.e., characteristic strength up to 40 MPa) and column spacings up to 5 m are recommended.

Manazir Hussain et.al (2020) Finding the ideal column spacing in a tube frame without sacrificing structural response was the main goal of the study article. In four tubular structures with a building height of 600 feet, the columns are placed at heights of 7.5 feet, 10 feet, 15 feet, and 30 feet, respectively. The flat plate technology was used, and its impact on the structure's cost was noted. A straightforward linear static analysis was performed, seismic loading was applied to each model, and the base shear and drifts were adjusted by modifying the column cross-section to get the lowest steel ratio.

Conclusion: Lateral sway is significantly influenced by a structure's height, which is why the columns in the tube's periphery are spaced closely. Due to the observation that the use of flat plate slabs accounts for 50% of the overall cost,

such slab framings are not recommended for high rise structures in order to make the construction more affordable. The base shear will decrease with increasing column spacing, but the cost will increase since thick sections must be used in the design. Therefore, a tubular construction with 10 ft column spacing was recommended as the most cost-effective frame for a 60 storey skyscraper.

III. METHODOLOGY

Steps involved in Modelling and Analysis

Step 1- Firstly research papers from different authors were studied to identify the scope of research and have an elaborate study about the research done till date. Authors have studied the structure behaviour with change in size of column and this led us to identify the research topic as such research are still untouched for high rise structures.

Step 2: The first step is to define the units in ETABS for the purpose of modelling. Here the display units as metric SI and the further values are defined as per the Indian standards for different material involved in the process of construction. The pre-defined properties as per the categories are defined in the software where the different country codes are available as ASI standards, Chinese standards, Indian standards and Australian standards.

Step 3: This step involves defining the grid as ETABS provides the provision to choose from the predefined grid system proving its ease for modelling the structure.

Step 4: Defining material properties for concrete, steel, infill and rebar. In this study, M30 concrete is considered along with HYSD500 rebar.

Step 5 Defining sections properties for column, beam and slab. Step 6 Assigning Fixed Support at bottom of the structure for X, Y and Z-direction.

Step 7 Defining Loading conditions for live load, dead load and seismic loads.

Step 8 Checking the model for the analysis

Step 9 Results were generated on parameters of storey displacement, shear force, bending moment and axial force.

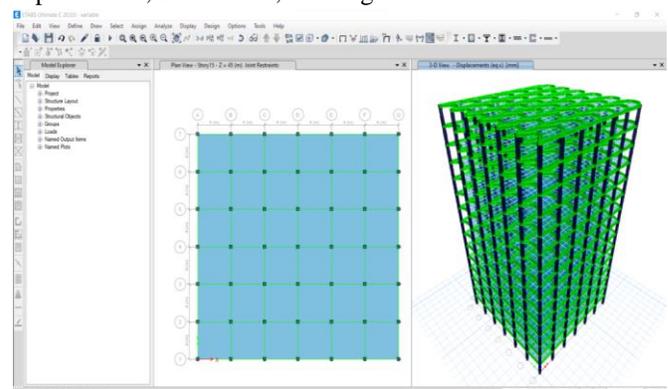


Fig 1: Stress Analysis of structure

CASE STUDY

Three cases are considered under the research considering the same G+14 storey structure and similar loading condition.

Case I Column Size 300mmx300mm (C1).

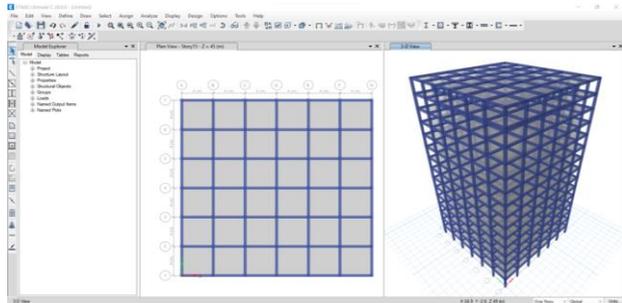


Fig 2: Case I (300mmx300mm)

Here in the G+14 storey structure the column size is considered as 300mmx300m.

Case II Column Size 400mmx400mm (C2)

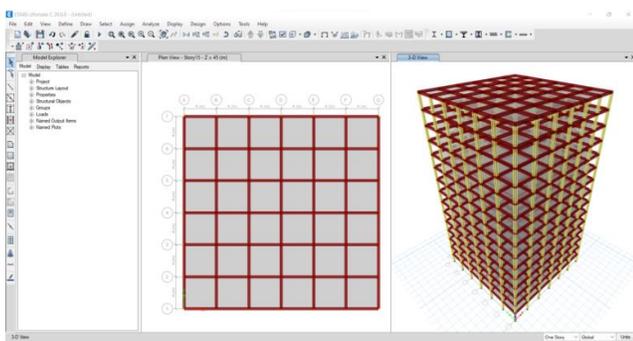


Fig 3: Case II (400mmx400mm)

Here in the G+14 storey structure the column size is considered as 400mmx400m.

Case III Combination of C1 and C2.

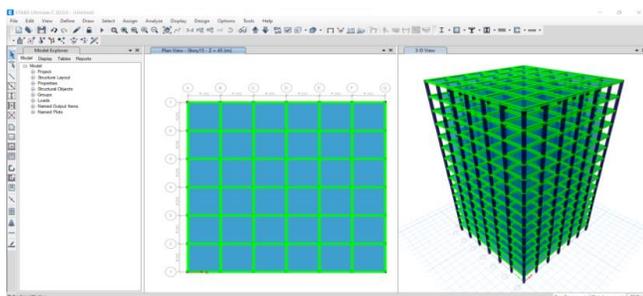


Fig 4:Combination of C1 and C2.

Here in the G+14 storey structure, C2 column is provided at the other side of the structure whereas C1 column

is used at the inner side of the structure and the same combination is followed at each floor.

IV. RESULTS AND DISCUSSION

1. Lateral Displacement in mm

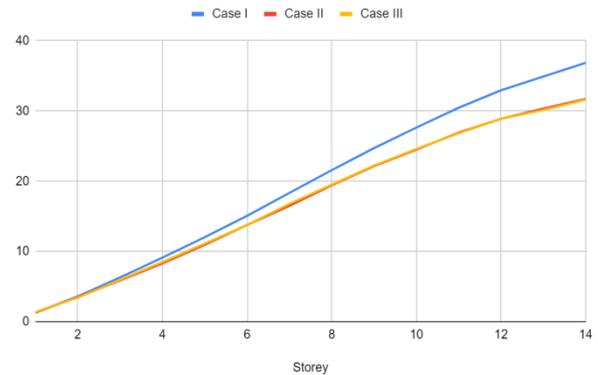


Fig 5: Lateral Displacement in mm

2. Lateral Drift in mm

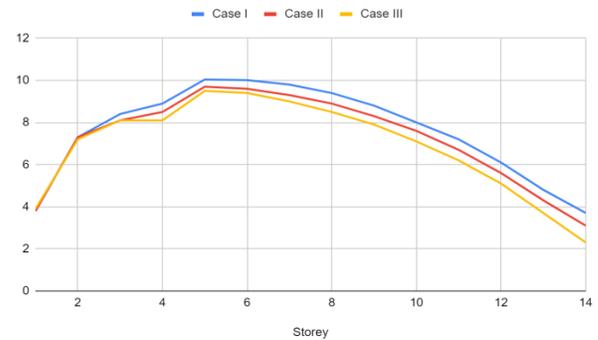


Fig 6: Lateral Drift in mm

3. Storey Shear in KN

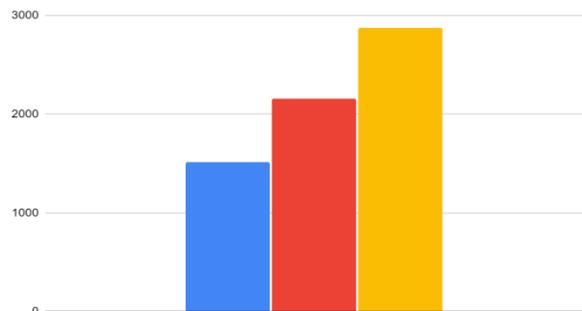


Fig 7: Storey Shear in KN

4. Axial Force in KN

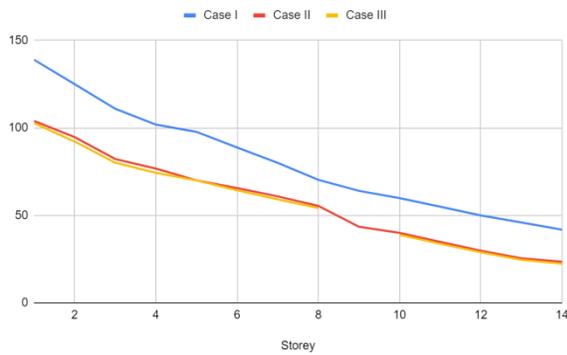


Fig 8: Axial Force in KN

5. Maximum Storey Stiffness in KN-m

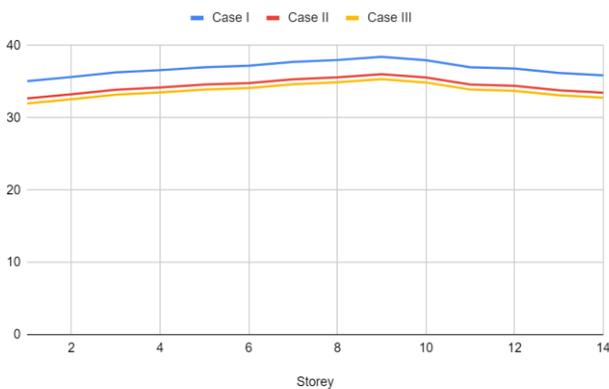


Fig 9: Maximum Storey Stiffness in KN-m

V. CONCLUSION

To ascertain the impact of column spacing on economy, a comparative study of the construction of G+14 R.C. Moment Resisting Frames was conducted. Three scenarios of column spacing—C1 (300x300mm), C2 (400x400mm), and combination (C1 and C2)—are taken into consideration in order to assess the impact of column spacing on economy. The structure is modelled, examined, and created using E-TABS in accordance with IS 456:2000. The amount of concrete, steel, and shuttering is calculated based on the E-TABS. In order to determine the relation for the ideal column dimension or combination taking into account the same loading conditions of the buildings, these models are analysed. The building's aspect ratio is set at 1.5, and the most cost-effective structure is determined using the entire cost of the materials used—concrete, steel, and shuttering.

Storey Displacement

Lateral displacement is important when structures are subjected to lateral loads like earthquake and wind loads. Lateral displacement depends on height of structure and

slenderness of the structure because structures are more vulnerable as height of building increases by becoming more flexible to lateral loads. Lateral displacement was maximum for case I where the column size was 300mmx300mm and case II and Case III were found stable in handling lateral forces. Marginal difference was seen of 0.2% in case II and Case III.

Storey Drift

The amount of sideways movement between two adjacent stories of a structure brought on by lateral (seismic and wind) loads is known as lateral (story) drift. The amount of horizontal roof displacement for a single-story building is equal to the amount of lateral drift. Lateral drift was found least in Case III proving to be 2.3% less than Case II and 4.5% less than Case I. Maximum storey drift was visible in storey 5 and storey 6.

Storey Shear

Storey shear factor is the ratio of the story shear force when story collapse occurs to the story shear force when total collapse occurs. Through a series of dynamic analyses, simple equations are provisionally proposed to calculate the necessary story shear safety factor that can be used to prevent story collapse. Storey shear was maximum for Case III 12% higher when compared to Case II and 18% higher than case I. Maximum Storey shear for case III was 2876.87 kN.

Axial Force

Axial force refers to a load whose line of action runs along the length of a structure or perpendicular to the structure's cross-section. Moreover, the line of force goes through the center of gravity of the member's cross-section. When this load tends to compress the member along its line of action, it is an axial compression load and carries a negative sign by convention. While if the load extends the member along its line of action, it is an axial tension load, carrying a positive sign. Axial force was 7.12% higher in Case I when compared to Case II and Case III.

Storey Stiffness

The bottom of the storey is the only part that is restricted from moving laterally; the remainder of the storey is free to rotate. Storey stiffness is calculated as the lateral force causing unit translational lateral deformation in that storey. Storey stiffness was 3.1% higher in case I when compared to case II and case III.

REFERENCES

- [1] Jingbo An, [Study on Optimization Design of Reinforced Concrete Special-shaped Column Frame Structure], Chemical Engineering Transactions, Vol. 62, 2017.
- [2] Mohammad Hossaina and Fayez Moutassem, [Column Slenderness Analysis for Reinforced Concrete Frame Structures using Finite Element Modelling], Journal of Buildings and Sustainability, 2017, Vol. 2, No. 2.
- [3] Kuldeep Kumar Chaudhary, Sabih Ahmad, Syed Aqeel Ahmad, Anwar Ahmad and Rajiv Banerjee, [ANALYTICAL STUDY ON THE STRUCTURE BEHAVIOUR OF REGULAR AND IRREGULAR SPACE FRAME BY STAAD.PRO V8i], International Journal of Recent Scientific Research Vol. 9, Issue, 5(D), pp. 26749-26754, May, 2018.
- [4] Manazir Hussain, Laiq Hussain, Ataullah Maher and Safdar Abbas Zaidi, [Optimum spacing of columns in a tubular frame for the design of tall buildings], Australian Journal of Basic and Applied Sciences, 2020 October; 14(10): pages 8-16.
- [5] Laxman Lal Kumawat, Jitendra Khatti and Dr. B.P. Suneja, [Comparative Study of G+10 and G+20 R.C. Moment Resisting Frame Building to Determine the Effect of Column Spacing on Economy], International Journal of Advance Research in Science and Engineering, Volume no. 7, January 2018.
- [6] Himanshu Krishna and Prince Yadav, [Study the Seismic Behavior of Special Columns in Multi-Story (G+4) Building for Seismic Zone III], International Journal for Research in Applied Science & Engineering Technology (IJRASET), Volume 10 Issue VIII August 2022.
- [7] Sourabh Dhiman, Nirbhay Thakur and Nitish Kumar Sharma, [A Research on the Behaviour of Columns of Steel Framed Structure with Various Steel Sections], International Journal of Innovative Technology and Exploring Engineering (IJITEE) ISSN: 2278-3075, Volume-8 Issue-8 June, 2019.
- [8] Ami A. Shah and B. A. Shah, [SEISMIC EVALUATION OF RC SPACE FRAME WITH RECTANGULAR AND EQUIVALENT SQUARE COLUMN BY PUSHOVER ANALYSIS], International Journal of Research in Engineering and Technology, Volume: 03 Issue: 07 | Jul-2014.
- [9] Vishal Yadav and Vivek Garg, [Analysis of Space Frame under Pattern Loading], international Journal of Scientific and Research Publications, Volume 7, Issue 9, September 2017, ISSN 2250-3153.
- [10] G Sri Lakshmi and J D Chaitanya Kumar, [INFLUENCE OF OPTIMAL COLUMN SPACING FOR G+11 STOREY RC MOMENT RESISTING FRAME], International Journal of Civil Engineering and Technology (IJCIET) Volume 8, Issue 1, January 2017.
- [11] Venkataraj. M and Helen Santhi. M, [Influence of Grid Spacing of Columns in Flat Slabs by Distributing Moments and Shear using Bonded Post Tensioned System], International Journal of Engineering Research & Technology (IJERT) ISSN: 2278-0181, 2015.
- [12] Pavithra S M and Geetha K, [Composite Column Subjected to Non-Linear Time History Method in Comparison to Conventional RC Column], International Research Journal of Engineering and Technology (IRJET), Volume: 06 Issue: 08 | Aug 2019.
- [13] Sumit Udakhe and K.R. Ghadge, [ANALYSIS OF RCC FRAMED STRUCTURE FOR COLUMN WITH MODELING IRREGULARITIES], Journal of Emerging Technologies and Innovative Research (JETIR), 2019 JETIR April 2019, Volume 6, Issue 4.
- [14] Paolo Foraboschi, [Optimal Design of Seismic Resistant RC Columns], Materials 2020, 13, 1919.
- [15] Mohammed Rady and Sameh Youssef Mahfouz, [Effects of Concrete Grades and Column Spacings on the Optimal Design of Reinforced Concrete Buildings], Materials 2022, 15, 4290.